

## 2007-2017 JK Wrangler

### Wire Mesh Cutout Grille w/Rivets & LED Light Bar - Black Stainless



#### Step 1\\

Using a panel removal tool, remove the (6) push clips holding the grille cover to the vehicle. Unplug the turn signals and pull grille cover from the vehicle.



#### Step 2\\

Mark and cut out your factory grille surrounds using rotary cutting tool.



#### Step 3\\

Next, lay the mesh grille on the factory grille. Using a marker, mark the (10) mounting holes. Using a 5/16" drill bit and drill, drill the mounting holes.




#### Step 4\\

Secure the grille to the grille cover using a supplied M4 hardware.

## 2007-2017 JK Wrangler

### Wire Mesh Cutout Grille w/Rivets & LED Light Bar - Black Stainless

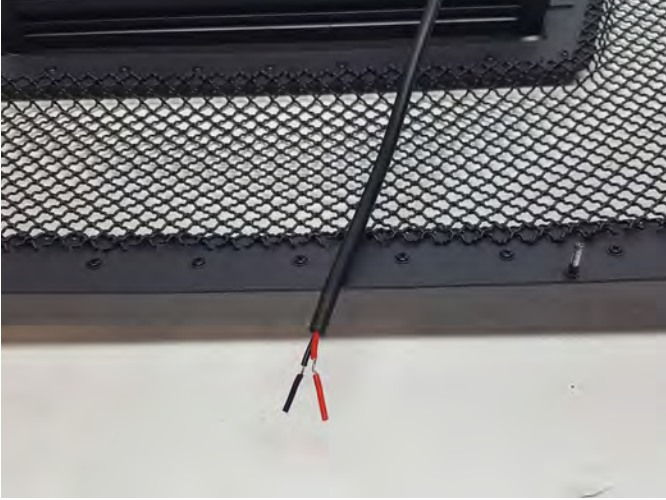

#### Step 5\\

Optional LED Wiring Diagram:  
Red- Switch ignition 12Volt  
Black- Chassis Ground



#### Step 6\\

Reinstall the grille using the factory push clips.