

REDROCK^{4X4}

*****Before beginning, be sure the door sills are clean and free of any grease, dirt, or rust*****

Step 1:

Using the supplied alcohol prep pads, thoroughly wipe down the area of the door sills where the entry guards will adhere.



Step 2:

Peel the backing from the 3M tape on the front entry guard and install on door sill. Line up the front of the guard with the notch in the door jamb as shown.




If installing on a TJ or 2-Door JK your installation is now complete. If installing the rear guards on a 4-Door JK, please move to Step 3.

Installation Instructions for Red Rock 4x4 Door Entry Guards (97-06 Wrangler TJ / 07-14 Wrangler JK 2-Door & 4-Door)

Step 3:

*****Rear 4-Door JK Only*****

The rear door sills are tapered from the factory, the large section of the entry guard goes towards the front of the vehicle as shown.

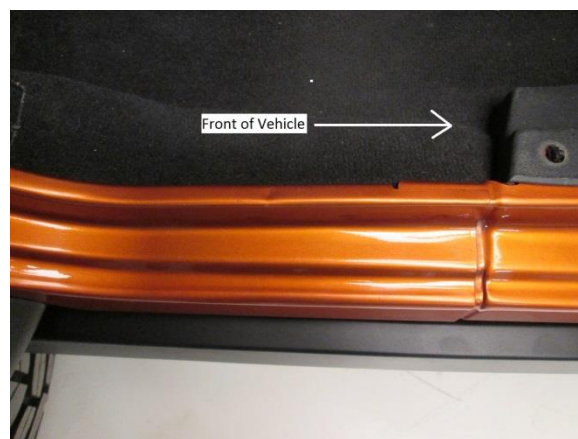

Step 4:

Peel the backing from the 3M tape and install the rear entry guard as shown below. Place the upper lip over the upper door sill and then press down to fully seat the adhesive.

