


INSTALLATION INSTRUCTIONS
WHEEL TO WHEEL NERF-STEPS
07+ JEEP WRANGLER JK
Part #'s J0746, J0764, J1246

PARTS AND HARDWARE INCLUDED
1 - DRIVER SIDE STEP
1 - PASSENGER SIDE STEP
2 - M8 X 35MM BOLTS
12 - M8 X 20MM BOLTS
12 - M8 NUTS
6 - 3/8" FENDER WASHERS
6 - 3/8" X 1 1/4" BOLTS
6 - 3/8" CLIPS
2 - 3/8" NUTS WITH WASHERS (J1246 ONLY)
2 - SELF-TAPPING SCREWS (J1246 ONLY)
2 - MOUNTING BRACKETS (J1246 ONLY)

TOOLS NEEDED
1/2" SOCKET
3/8" SOCKET
RATCHET
1/2" SOCKET
10mm SOCKET
9/16" SOCKET


CAREFULLY READ EACH STEP BEFORE ATTEMPTING TO INSTALL. ALL 2012 AND NEWER JEEP JK'S REQUIRE THE USE OF AN ADDITIONAL BRACKET AS EXPLAINED IN THE FINAL NOTE AND SHOWN IN FIGURE 3.

Step 1: Find both the driver and passenger side steps. Note: The passenger side front step is further away from the bend and the holes will line up to the bracket on the floor pan. See Figure 1.

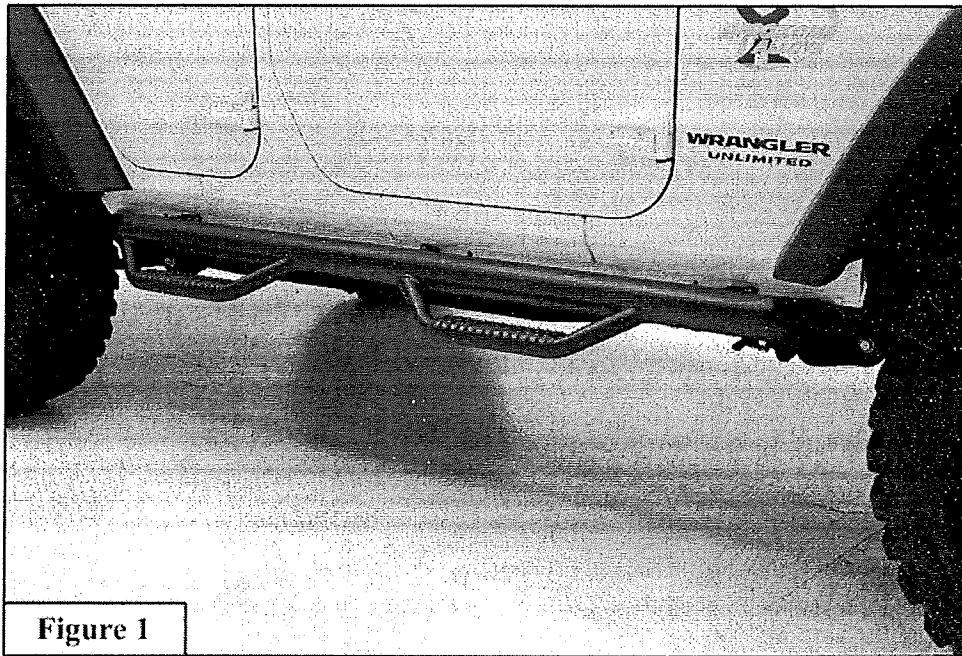

For Technical Support/Warranty Information Please Call 281-880-6322

N-FAB Inc., 14925 Stuebner Airline Rd. Ste. 207, Houston, TX 77069

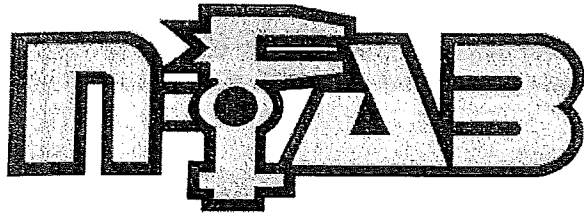

INSTALLATION INSTRUCTIONS
WHEEL TO WHEEL NERF-STEPS
07+ JEEP WRANGLER JK
Part #'s J0746, J0764, J1246

Step 2: Using the supplied bolts, install the step bar starting with the bolts in the pinch weld and then install the bolts on the underside. **Note: Leave all of the bolts loose until all bolts are in place and tighten the bolts in the pinch weld first.**

Step 3: Repeat the process for the other side.

Note: Part number J1246 requires the use of an additional bracket. There is a 3/8" allen head welded into the bracket and the head of it fits into a factory void hole. See Figure 3. The front of the bracket is held in with one of the supplied hex head bolts and the rear is secured using one of the supplied self-taping screws. This must be installed prior to the Nerf-Step being secured to the vehicle.

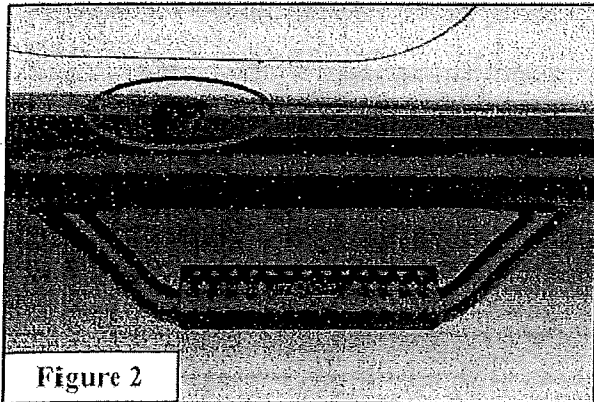


Figure 2

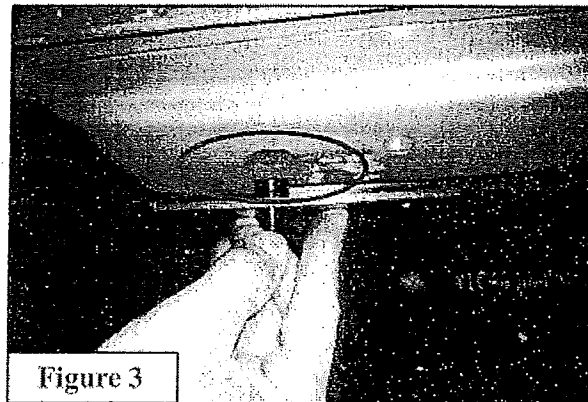


Figure 3

For Technical Support/Warranty Information Please Call 281-880-6322

N-FAB Inc., 14925 Stuebner Airline Rd. Ste. 207, Houston, TX 77069