

# REDROCK<sup>4X4</sup>

2007-2017 JK Wrangler


## Defender Grille

### Contents:

(1) - Replacement Grille

### Tools Needed:

Flat Head Screw Driver/ Panel Removal Tool  
Razor Knife

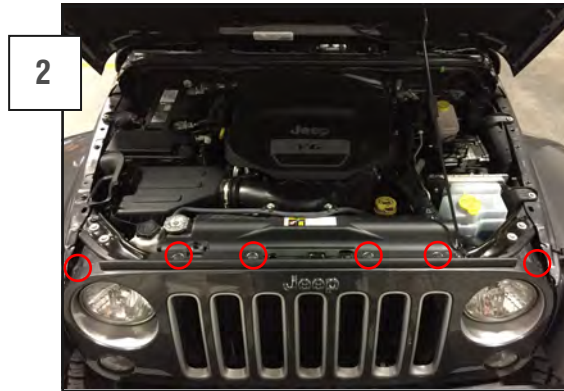

Next, raise the hood to gain access to the (6) plastic push clips securing the factory grille to the vehicle. Firmly pull on the bottom of the grille to remove the grille from the vehicle.



Install the factory turn signals on to the Defender Grille. **\*\*Note:** It may be necessary to lightly trim the grille tab to install the turn signal. Use a razor blade to trim a little bit at a time. Test fit after each trimming.



Access the connectors on the rear of the turn signals from the wheel well. The turn signal clips have a red locking tab, first slide the locking tab out. Then depress the clip to remove the signal plug.



With the grille removed, depress the (2) retaining clips on the factory turn signals to remove them from the grille.



Reinstall the grille cover in reverse order, making sure to reconnect the turn signals.